




The Beneteau 40

Standard Equipment and Options

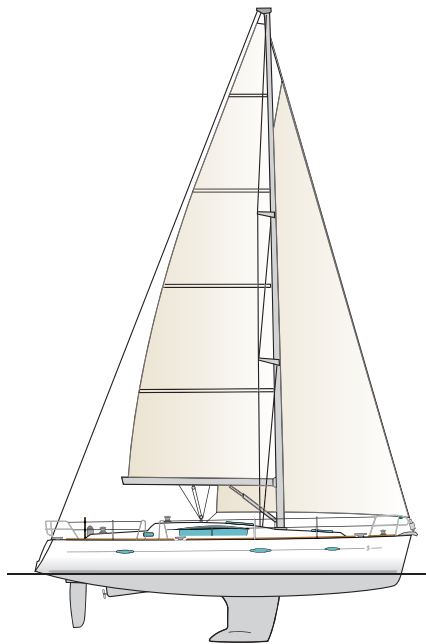

Two cabin



Three cabin

LOA	39'10"
Hull length	58'9"
LWL	33'11"
Beam	12'10"
Displacement	18,210 lbs
Sail area843 sq ft
Draft	(standard) 5'1" ... (optional) 6'3"
Ballast (standard)	5,198 lbs
Ballast (optional)	4,643 lbs
Fuel capacity52 gal
Water95 gal
Auxiliary40 hp
Hull Design: Berret-Racoupeau	
Interior Design: Nauta Yachts	

Rig Dimensions: Mast ... Classic ... Furler	
I	48'10" ... 49'3"
J	12'11" ... 12'11"
P	46' ... 45'8"
E	15'8" ... 15'9"

CONSTRUCTION

Hull of hand-laid solid GRP bonded to a structural grid/hull liner of directional fiberglass/GRP for a strong, stiff, light composite. Vinylester hull barrier coat to resist osmotic blistering and zone-specific stitchmat laminates for specific increased strength optimization.

Cored GRP sandwich construction for stiffness, thermal and acoustic insulation and lighter weight. Solid fiberglass reinforcements in high load areas. Integral unidirectional GRP deck beams for added strength. Main bulkheads bonded 360° to the hull and deck for rigid torsional and compressive strength.

STANDING RIGGING

Anodized aluminum roller furling mast and boom
Fractional 9/10 anodized aluminium deck stepped mast standard w/mainsail furling system
Twin aft swept spreader
Anodised aluminium boom w/outhaul car
Stainless steel shrouds and stays
Genoa roller furling system
Stainless steel chain plates tied to the inner moldings w/stainless steel tie rods

RUNNING RIGGING

Running rigging is led to the cockpit
Running rigging includes:
(2) Main halyard, (1) Genoa halyard w/jammer & cleat on mast, (1) boom topping lift w/cleat on mast, (1) Roller furling mainsail outhaul line and (1) inhaul line, (1) mainsheet w/track, (2) mainsheet traveller control lines, (2) Genoa sheets
Rigid boom vang

SAILS

Furling genoa w/140% overlap, reinforced w/anti-UV protection strip
Furling mainsail w/ vertical battens

DECK GEAR

Chrome finish Lewmar® self tailing winches:
(2) Lewmar® 46 CST Genoa sheet winches on coaming
(2) Winches on coachroof: (1) 40 on port & (1) 40 on starboard
(2) Winch handles & (2) winch handle pockets

MOORING AND ANCHORING

Welded stainless steel bow fitting
(1) Bow roller w/permanent anchor storage
(6) Aluminum mooring cleats w/rub strakes
Self-draining anchor well w/hatch
1000 W vertical windlass w/remote control

ON DECK

Stainless steel open bow rail w/nav light
(2) Stainless steel stern rails
Lifebuoy holder, outboard motor bracket, & flag stay
Double vinyl coated lifelines w/ gates
Opening side gates in lifelines
Teak toe rail surrounding deck
(3) Cockpit stowage lockers
Teak inlaid cockpit seats
(2) Compasses, one at each helm position
GRP cockpit table w/2 drop leaves fitted w/locker, bottle stowage & SS handrail
Drink Holders
(2) Waterproof speakers
(2) Winch handle pockets
Reading lamp w/12 Volt socket
(1) Shore supply socket to starboard
2-bottle gas locker (1-bottle standard)
Access to bathing platform via pivoting seat
Teak slatted swim platform
Swim ladder with teak steps
Hot & cold cockpit shower

STEERING

Spade rudder with s/s stock
Double helm position in cockpit
(2) 36" dia. steering wheels
Emergency tiller access point & emergency tiller

ACCOMMODATIONS

Light toned ALPI- MOABI woodwork, soles w/parquet look

OWNER'S CABIN FORWARD

Headroom: 6'3"
Double berth: 6'6" x 5'3" w/high density foam mattress
Ample stowage space: large drawer under berth, Locker w/clothes locker under hanging section
(2) Lockers to either side of berth, hanging locker
Dressing table w/mirror & locker
Large opening hatch with blind/screen
Opening hatch with blind/screen
(2) Fixed hull ports (1 each side of hull) w/curtains
(3) Halogen overhead lights
(1) 110 Volt socket beside dressing table

SALON & COMPANIONWAY

Salon companionway w/non-slip surface
(2) Stainless steel handrails
Aft-facing chart table w/lid & wood fiddle
(2) Hinged lockers, closed shelf
Drawer & closed locker w/shelves under chart table
Fabric inner lining to side
Navigator's seat w/locker
Radio/CD/MP3 player w/two speakers
(1) 110 Volt sockets
2-seater settee with central armrest
(2) Closed stowage units and shelves along the hull
Port & starboard shelves w/stainless steel fiddles
U-shaped dining table/settee & 4 cushions
Stowage under settees, Salon table
Stowage along the hull
(3) Closed shelves along the hull
(2) Hull ports (1 port/1 starboard) with curtains
(1) Panoramic window w/folding blinds
(1) Opening deck hatch w/blind/screen
(2) Opening deck hatches w/Oceanair combination screen/privacy curtain
(2) Fixed side windows, (1) to port with (2) opening ports, (1) to starboard with (1) opening port, w/pleated blinds
Chart table lighting: (1) overhead light & (1) strip light for white/red lighting
Salon lighting: 4 halogen overhead lights, Companionway lighting: (1) halogen overhead lights, (1) switch for halogen lights

GALLEY TO PORT

Rectangular stainless steel double sink
Hot & cold pressurized mixer tap
Gimballed 2-burner stainless steel stove w/oven & stainless steel safety bar
4.55 cubic foot front-opening 12 Volt refrigerator
2 cubic foot top-opening GRP freezer w/12 Volt unit
110 Volt microwave oven operates off shore power
(1) Locker w/double door under sink & waste bin
Locker w/sliding stainless steel vegetable rack
(2) Closed shelves for stowage, cutlery drawer
(1) Shelf w/stainless steel fiddle
(1) Opening port in coaming
Galley lighting: (2) halogen overhead lights, (1) light over stove,
(1) 110 Volt socket

STARBOARD AFT HEAD

One-piece molded head compartment w/separate shower w/double folding door
Manual marine toilet
21 gal rigid holding tank as standard
(1) FRP Washbasin & wood handrail. Hot & cold mixer tap
(2) Large closed lockers, glass holder & locker under washbasin w/accessories
(1) Fixed side window w/curtain & 1 opening port
(3) Overhead lights & switch, 1 light over the sink

AFT CABIN

Headroom: 6'9"
Double berth 6'10" x 4'11"
(2) Closed shelves along the hull
Hanging locker w/locker beneath
(1) Under-berth battery storage
Cloth inner liner on hull
Access door to head
Openings & lighting in each cabin: (1) fixed hull port w/curtain, (1) opening port in coaming, (1) opening deck hatch w/blind/screen
(1) Cockpit opening port
(3) Halogen overhead lights w/switch
(1) 110 Volt socket

PLUMBING

Fresh water: 95 gal standard
Electric pressure water pump w/filter
(2) Rotomolded water tanks fixed to the hull liner (52 gal under port aft cabin berth & 42 gal under fore cabin berth)
(2) Stainless steel deck fillers for water
Cockpit shower w/hot and cold water
Electric shower drain pumps
(2) Bilge pumps (one manual and 1 electric)
(1) Electric pump for icebox drainage
6 gal electric water heater

ELECTRICAL

Backlit electrical panel: (10) 12 Volt switches
AC panel - (11) fused switches & (4) 110 Volt switches
12 Volt socket
110 Volt double pole circuit breakers
110 Volt - 12 Volt voltmeter
Water gauge & fuel gauge w/central LCD screen
Low battery and low diesel tank alarms
(1) 200 Amp service battery voucher
(1) 95 Amp engine start battery voucher
110 Volt shore power w/ 50' cable
80 Amp alternator coupled to the engine
40 Amp battery charger
12 Volt battery isolator
Lightning grounding for the rigging
(5) 110 Volt outlets
(6) Reading lights, (14) halogen overhead lights.
Bow & stern nav lights, steaming light, fore deck light
Anchor light/masthead navigation light
Wire conduits for options

ENGINE EQUIPMENT

Yanmar 3JH4E - 40 hp
Engine bed integrated in hull liner, soundproofed with insulating foam
Access under companionway steps through an opening supported by gas struts
Stainless steel propeller shaft w/GRP protection
Fixed three-blade propeller
Rotomolded 52 gal fuel tank w/electronic gauge
Seawater filter & diesel fuel filter/water separator
Engine panel w/integral key start in cockpit

OPTIONS

Consult your dealer for all available options