



The First 40.7

Standard Equipment and Options

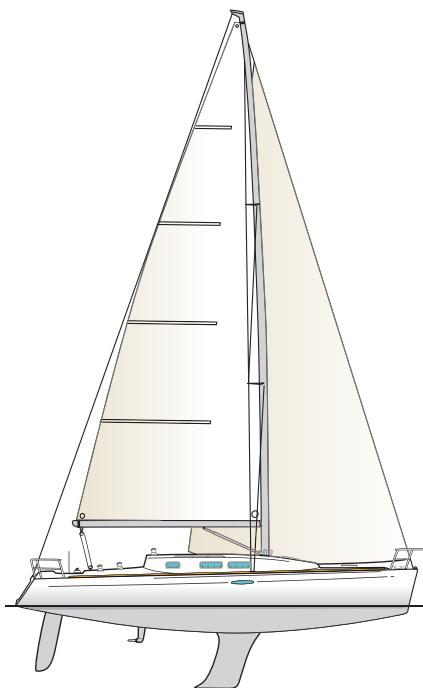

LOA	39'3"
Hull Length	39'1"
LWL	34'10"
Beam	12'5"
Displacement	15,366 lbs (approx)
Sail Area	685 sq ft
Draft	(standard) 7'9" ... (optional) 6'2"
Ballast (standard)	5,512 lbs
Ballast (optional)	5,512 lbs
Fuel Capacity	36 gal
Water	72 gal
Auxiliary	40 hp
Hull Design: Farr Yacht Design	

Rig Dimensions: Mast	Classic
I	51'3"
J	14'6"
P	50'2"
E	17'9"

CONSTRUCTION

HULL: Solid fiberglass/GRP with structural hull liner, laminated for load bearing and distribution

DECK: fiberglass/GRP balsa sandwich for rigidity reinforced with unidirectional rovings, weight saving, insulation and soundproofing

All bulkheads bonded 360 degrees to hull and deck for structural strength
Carbon fiber rudder and stock

ON DECK

Stainless steel stemhead fitting with roller
Self-bailing anchor locker with windlass support
Stainless steel bow pulpit with navigation lights
Varnished wood toe rail along the hull-deck junction
(6) Aluminum mooring cleats
Stainless steel stanchions (26in) with semi recessed bases
Double set of stainless steel lifelines
(1) Lewmar® Racing mainsheet traveller track with ball-bearing car adjustable under tension
(2) Lewmar® Racing genoa sheet tracks adjustable under tension
Mainsail tackle with ball-bearing blocks
(2) Harken® 44.2 STA maneuvering winches on coachroof
(2) Harken 48.2 STA genoa sheet winches
Spinlock® XT deckstoppers
Wichard® foldaway padeyes for spinnaker blocks
(2) Semi-recessed shroud chainplates
Leather-covered wheel with compass
Self-aligning upper and lower rudder bearings
Removable cockpit seat lockers
Teak helmsman seat
Teak-slatted cockpit seats & removable lockers
Aft lockers : port for gas bottle, starboard for stowage
Liferaft compartment below helm seat
Emergency tiller
Stainless steel aft pulpit with aft opening lifelines and horseshoe buoy holder
Stern light on pulpit
Flagpole and holder
Teak-slatted bathing platform
Stainless steel bathing ladder
Cockpit shower

STANDING RIGGING

Triple spreader Sparcraft® racing 9/10 tapered mast
Rod standing rigging
Tuff luff
Navtec hydraulic backstay adjuster
Spinnaker gear and pole

RUNNING RIGGING

(1) Mainsail halyard
(1) Spinnaker halyard
(1) Jib halyard
Spinnaker sheets
Spinnaker sheet winches

FORWARD CABIN

Headroom 6'2"
Double v-berth (7'3" x 5'9")
Storage under berth
Lockers alongside hull
Hanging locker
Opening Lewmar® deck hatch
Halogen reading lights
Ceiling lights

HEAD

Headroom 6'2"
Fully molded head compartment w/USCG approved marine toilet and holding tank
Round stainless steel washbasin with mixer tap, pressurized hot and cold shower
Locker with door
Titled mirror above washbasin
12 Volt sump pump for shower
Towel rails and accessories
Overhead light
(2) Lewmar® opening hatches

SALON

Interior Wood: Pear stained finish
Headroom 6'5"
Settee with cushions and backrests (settee length: 6'3")
Lockers above the seat-backs
Stowage in the settee backs rests
Bar in settee back rest to starboard
(1) Lewmar® opening hatch with blind
(2) Fixed hull ports
Grabrails with built-in blinds
Salon table with wood inlay and bar
(4) Overhead halogen lights
Opening ports

GALLEY

Headroom 6'5"
Double stainless steel rectangular sinks w/mixer tap
pressurized hot and cold water
Gimbaled 2-burner LPG stove with oven
12 Volt electric refrigerator w/basket for storage
Cutlery drawer
Trash can
(3) Stowage compartments with doors
(2) Overhead lights
Dust pan in the floor
(1) Lewmar® opening port

NAV STATION

Large 1'9" x 2'6" chart table
Electric water gauge
Stowage
Bookshelf
(1) Lewmar® opening port
Pigeon hole storage compartments

AFT CABINS

Headroom 6'3"
Double berth (6'7" x 5'4")
Hanging locker
Locker along the hull
Stowage space under berth
Storage shelves at head of bed
Overhead light
(1) Lewmar® port opening into the cockpit
(1) Lewmar® port opening into the cabinside

PLUMBING

Electric bilge pump
Hand-operated bilge pump
84 gals fresh water capacity
6 gallons water heater (engine & shore power)
Pressurized water system with expansion tank
12 Volt sump pump for shower

ELECTRICAL

12 Volt circuit
(1) 70 Amp battery - engine
(1) 110 Amp battery - house
16-function electrical panel
Navigation lights
110 Volt shore power
110 Volt battery charger (20 Amp)

ENGINE EQUIPMENT

34 gal fuel tank
Engine compartment soundproofed & insulated to USCG standards
Volvo® 2040 40 hp with Saildrive
Two-blade fixed propeller
Stainless steel shaft
Hour meter and fuel gauge

MISCELLANEOUS

Maintenance kit
(2) Winch handles
Owner's record and handbook

OPTIONS

Consult your dealer for all available options